WPLED52

City Electric Company, Inc.
Watertown (315) 782-0704
Ogdensburg (315) 394-0878
Oneida (315) 361-4149
www.cityelectricweb.com
Corporate Office
Syracuse (315) 474-7841
Oswego (315) 343-2739
Rochester (585) 247-3100
24 Hour Emergency Number (800) 999-7841

DESCRIPTION

LED 52 Watt Wallpacks

SPECIFICATIONS

Color Temperature (Nominal CCT)
5000k

Fixture Efficacy
57 Lumens per Watt

Surge Protection
6 KV

Color Accuracy
67 CRI

Heatsink
Cast aluminum thermal management system for optimal heat sinking. The WPLED is designed for cool operation, most efficient output and maximum LED life by minimizing LED junction temperature.

Finish
Chip and fade resistant polyester powder coat finish.

Country of Origin
Designed by RAB in New Jersey and assembled in Taiwan

Mounting
Die-cast aluminum wall bracket with (5) 1/2" conduit openings with plugs. Two-piece bracket with tether for ease of installation and wiring.

Arm
Die-cast aluminum with wiring access plate.

LEDs
Four (4) multi-chip, 13W high-output, long-life LEDs

Gaskets
High temperature silicone.

Reflector
Hydroformed aluminum designed for maximum efficiency.

Housing
Precision die cast aluminum housing, lens frame.

For use on LEED Buildings
IDA Dark Sky Approval means that this fixture can be used to achieve LEED Credits for Light Pollution Reduction

Warranty
RAB LED fixtures give you peace of mind because both the fixture and light engine components are backed by RAB's 5 Year Warranty. For more information,

IESNA LM-79 & IESNA LM-80 Testing
RAB LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 and 80, and have received the Department of Energy "Lighting Facts" label.

Color Stability
RAB LEDs exceed industry standards for chromatic stability.

Color Uniformity
RAB's range of CCT (Correlated color temperature) follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2008.

Ambient Temperature
Suitable for use in 40C ambient temperatures.

UL Listing
Suitable for wet locations as a downlight.

Dark Sky Approved
The International Dark Sky Association has approved this product as a full cutoff, fully shielded luminaire.

Patents
The WPLED design is protected by patents pending in the U.S., Canada, China, Taiwan and Mexico.

DIMENSIONS

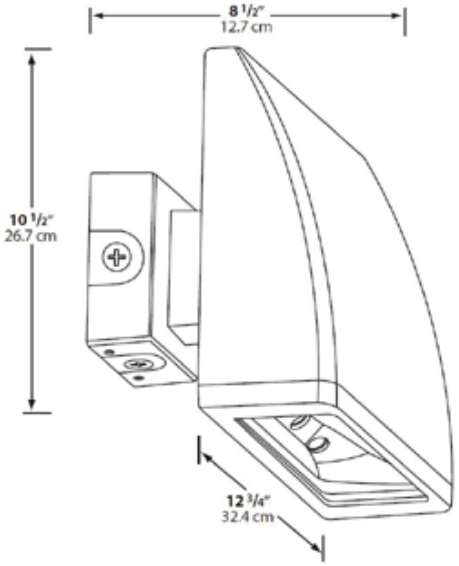

ORDERING INFORMATION

LED Lamp supplied with fixture	Total Watts	Lamp Type	Lamp Base	Ballast	Starting Amps/ Operating Amps 120V	208V	240V	277V	Input Watts	LAMP ANSI	Initial Lumens	Lamp Hours
	52	LED	Thermal Heatsink	Constant Current	.8 A/.8 A	.8 A/.8 A	.8 A/.8 A	.8 A/.8 A	60.0	N/A	3429	50000
Factory Installed Options Add suffix to Catalog Number	Photocontrol for 277V (/PC2)				Photocontrol for 120V (/PC)							

Note: Specifications may change without notice

RAB Lighting, Inc. • 170 Ludlow Ave• Northvale, NJ 07647 • Tel: 888 RAB-1000 • Fax: 888 RAB-1232 • www.rabweb.com
© 2011 RAB Lighting, Inc.