


Armor

Feeder MC Cable

#8-750 Kcmil multiconductor 600V copper with aluminum or galvanized armor

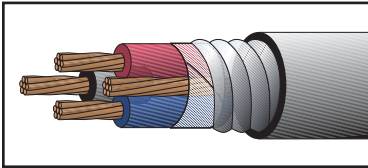

EnviroPlus® (LSZH) Armor

Factory Mutual Group 1 Rated


#14-750 Kcmil multiconductor copper 600V or optional 2kV.

Interlocked Armor/ PVC Jacket 600V

#14-750 Kcmil multiconductor copper 600V or optional 2kV.

Aluminum or galvanized armor with overall PVC jacket.

5kV and 15 kV - All sizes

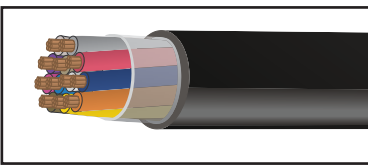

Tray/Power and Copper Service Entrance*

XLP/PVC Tray Cable 600V

#16-750 Kcmil multiconductor copper 600V

XLP/PVC Shielded Tray Cable 600V

#16-750 Kcmil multiconductor copper 600V with 5 mil copper tape shield.

FR-XLP/CPE Tray #16-750 Kcmil multiconductor copper 600V



EnviroPlus® (LSZH) Tray/Power Factory Mutual Group 1 Rated

#16-750 Kcmil multiconductor 600V or optional 2kV. Also available with 5 mil copper tape shield.

SER/SEU Copper Service Entrance

8-4/0 multiconductor copper 600V

*Now available with rip cords

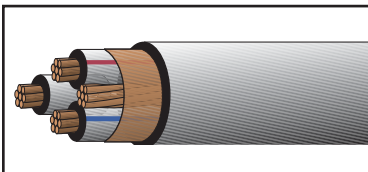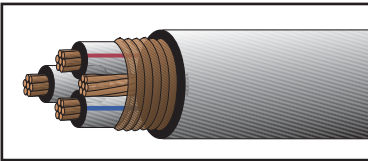


ServiceDrive® and ServiceDrive®Plus ASD/VFD Cable

ServiceDrive® Patented Tray/Power Cable

#14-750 copper 600V shielded with overall PVC or Factory Mutual Group 1 EnviroPlus® (LSZH) jacket.

ServiceDrive® Patented Armored Cable

#14-750 copper 600V shielded with overall Factory Mutual Group 1 EnviroPlus® (LSZH) or optional PVC jacket.

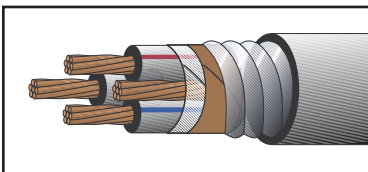

ServicePlex® (Twisted) and Aerial

ServicePlex® - A better solution to paralleling

#14-750 Kcmil copper 600V, XHHW-2, XLP-USE-2, THW-2

400 Hz ServicePlex®

#8-750 Kcmil XHHW-2 multiconductor copper 600V. XLP-USE-2 conductors are available.

Copper Service Drop and Triplex or Quadraplex




#8-750 Kcmil copper, 600V XLP


Preassembled Aerial

Copperweld, galvanized, stainless steel (304,316) or PVC coated messengers.

All sizes, 600V, 5kV, 15 kV (XLP, EPR)

Engineered and composite constructions available.

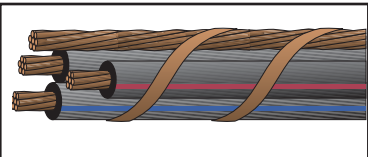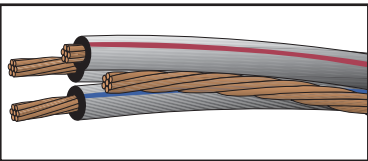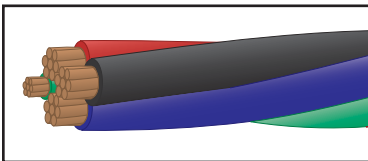

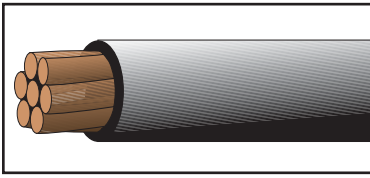


XHHW-2, XLPE USE-2 / RHH / RHW-2, and Photovoltaic

XHHW-2

#14-750 Kcmil CT Rated 600V. Available in colors and VW-1

XLPE USE-2/RHH RHW-2

#14-750 Kcmil CT Rated 600V (UL)/1,000V (CUL). Available in colors and VW-1. Optional in 2kV.

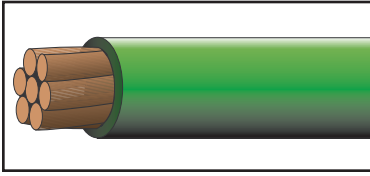


ServiceSolar™ Photovoltaic 600V & 2kV Singles

#14-750 Kcmil XLPE RHH / RHW-2. For use in Solar Systems up to 2 kV. UL 4703 - Printed PV

ServiceSolar™ Photovoltaic LSZH Single

#14-750 Kcmil. Zero Halogen jacket. For use in Solar Systems up to 600V. UL 4703 - Printed PV

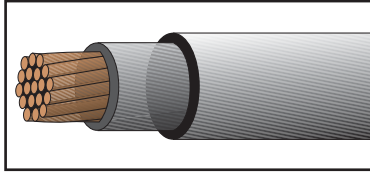

Single Conductors

SIS


#14-6 VW-1 rated, tinned copper, fine strand, switchboard wire

#14-6 VW-1 rated, tinned copper, 7 strand dual rated SIS/XHHW-2

#16 FFH-2, tinned copper, fine strand

THW & THW-2

#14-1000 Kcmil, available in colors, CT rated, all sizes VW-1 rated

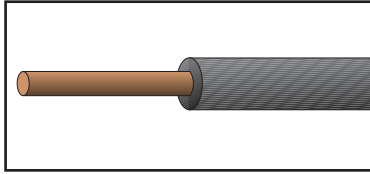

EnviroPlus® (LSZH)

#14-750 Kcmil, low smoke, zero halogen, zero lead jacket, CT rated

Weather Proof Line Wire


#6-1000 Kcmil, hard, medium hard, soft drawn copper poly line wire

Cathodic Protection

#8-4/0 AWG stranded copper HMW-PE

Transformer Riser Wire

#8-4 AWG copper, solid and stranded

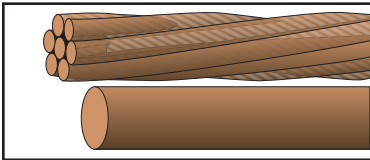

Bare Copper

Bare Copper

#14-4/0 AWG solid copper


#14-1000 Kcmil stranded copper

Available hard, medium hard, and soft drawn

Tinned Copper

#6-500 Kcmil stranded tinned copper

2 AWG solid tinned copper

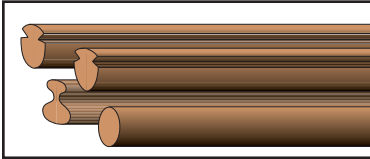


Plater Wire

#24-2 AWG solid soft drawn

Trolley Wire

1/0-400 Kcmil copper & bronze alloys, round grooved, fig.8, fig.9 constructions

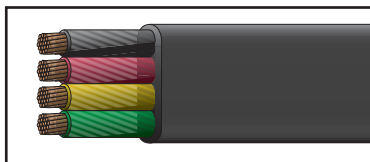

Pump and Irrigation

Submersible Pump Cables

Heavy Duty Flat Black Jacketed

#14/2-500/3

Flat Rainbow™


#14/2-4/3

Twisted Jacketed

#14/3-2/3

Twisted

#14/2-2/3

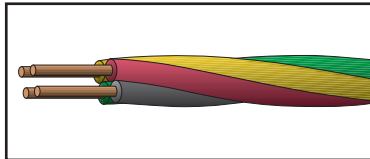

UF Irrigation Cable


Single conductor #18-8 AWG solid, #6-4/0 AWG stranded copper

Sprinkler Control Cable

#18/2-18/13 conductor solid copper

Low Energy Circuit Cable/ Landscape Lighting Cable

#16/2 and #12/2-8/2 copper underground landscape lighting cable 150V

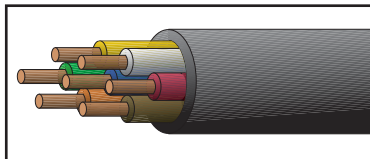

servicewire.com

